


Dimensions in Inches, Tolerances: .XX ± .03 .XXX ± .010

**A.C. CURRENT SENSOR
SERIES 1003AM1-B**

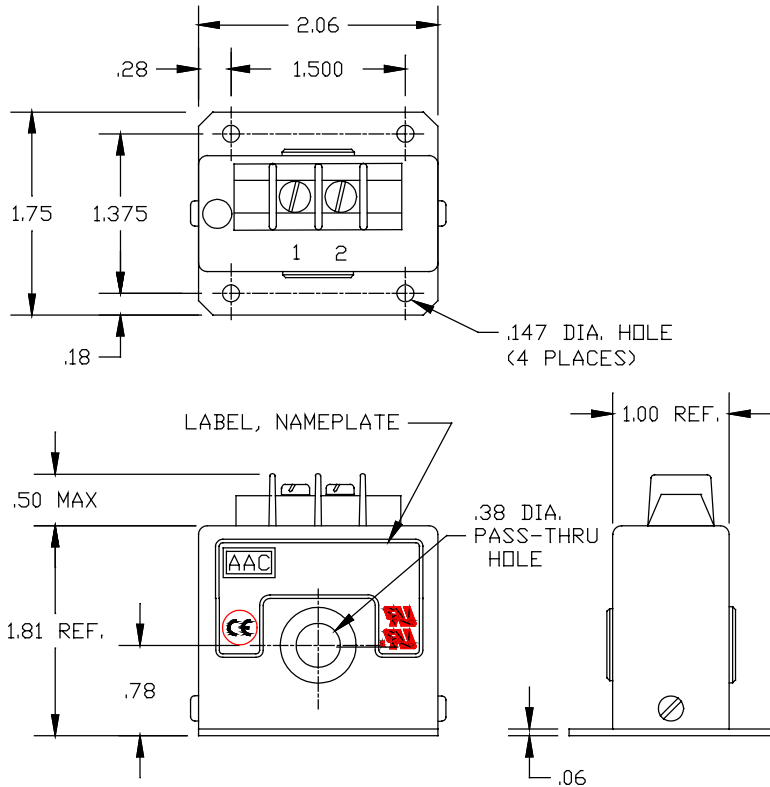

<u>MODEL NO.</u>	<u>INPUT CURRENT</u>	<u>OUTPUT IMPEDANCE</u>
1003AM1-2-B	0 to 2Aac	25
1003AM1-5-B	0 to 5Aac	10
1003AM1-7-B	0 to 7Aac	8.0
1003AM1-10-B	0 to 10Aac	5.0
1003AM1-15-B	0 to 15Aac	4.0
1003AM1-20-B	0 to 20Aac	2.5
1003AM1-25-B	0 to 25Aac	2.2
1003AM1-30-B	0 to 30Aac	2.0
1003AM1-40-B	0 to 40Aac	1.5
1003AM1-50-B	0 to 50Aac	1.0
1003AM1-60-B	0 to 60Aac	0.8
1003AM1-75-B	0 to 75Aac	0.75
1003AM1-100-B	0 to 100Aac	0.5

INPUT

CURRENT RANGE	See Table
FREQUENCY	60Hz
FREQUENCY RANGE	57 to 63Hz
OVERLOAD	250Aac Continuous

OUTPUT

VOLTAGE SIGNAL	0 to 5Vdc FS (Full Scale)
ACCURACY	± 1% FS for 10A range and above ±2% FS for 2A & 5A ranges
RIPPLE	3% FS RMS max.
RESPONSE	150 m-sec max.
REPEATABILITY	± 0.5% FS
TEMPERATURE COEFFICIENT	± 0.04% FS/ °C max. for 10A ranges & above ±0.08% FS/°C for 2A & 5A ranges
OUTPUT IMPEDANCE	K-Ohms See Table
OUTPUT SIGNAL @ OVERLOAD	11Vdc max.

POWER SUPPLY

SUPPLY VOLTAGE	None, self excited
----------------	--------------------

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	- 20° C to 70° C
STORAGE TEMPERATURE RANGE	- 55° C to 85° C
ISOLATION	Input/Output/Case
INSULATION RESISTANCE	100 M-Ohms output to case
WEIGHT	5 oz. max.



UL RECOGNIZED CSA RECOGNIZED EU RECOGNIZED

TERMINAL IDENTIFICATION

1. OUTPUT SIGNAL (+)
2. OUTPUT SIGNAL (RTN)

MOLDED TERMINAL BLOCK WITH 5-40 TERMINAL SCREWS 3/8 IN. CENTER TO CENTER SPACING. ACCEPTS WIRE SIZES UP TO 14 AWG & WIRE LUGS UP TO 9/32 IN. WIDE.

AAC	Drawing Number 700-1003AM1-B	Rev. R
------------	---	-------------------