
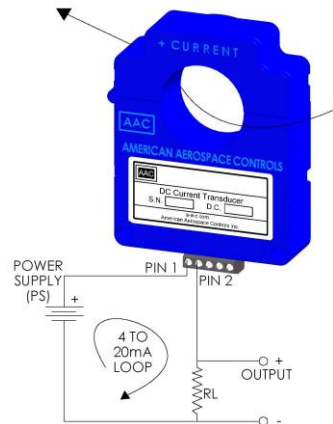


Dimensions in Inches, Tolerances: .XX ± .06 .XXX ± .030

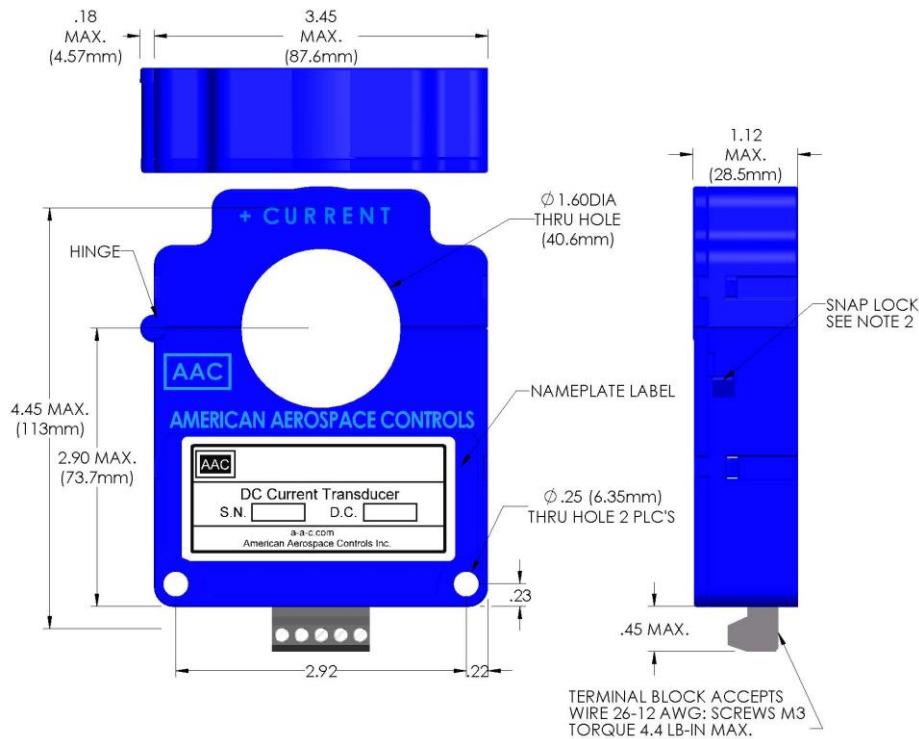

TERMINAL IDENTIFICATION

- PIN 1 : POWER
- PIN 2 : RTN
- PIN 3 : N.C.
- PIN 4 : N.C.
- PIN 5 : N.C.

PIN NUMBERS NOT SHOWN ON UNIT

ORDERING INFORMATION

921	-	1000	-	C
SERIES		CURRENT RANGE		TERMINATION
				Blank: Terminal Block
				C: Connector Option

**DC CURRENT TRANSDUCER
SERIES 921
4 TO 20 mA 2 WIRE LOOP POWER
CLAMP ON**

<u>PART NO</u>	<u>CURRENT RANGE</u>	<u>ACCURACY</u>
921-200	0 TO 200Adc	1.5%
921-250	0 TO 250Adc	1.5%
921-300	0 TO 300Adc	1.5%
921-400	0 TO 400Adc	1.0%
921-500	0 TO 500Adc	1.0%
921-600	0 TO 600Adc	1.0%
921-750	0 TO 750Adc	1.0%
921-800	0 TO 800Adc	1.0%
921-1000	0 TO 1000Adc	1.0%
921-1500	0 TO 1500Adc	1.0%
921-1700	0 TO 1700Adc	1.0%
921-2000	0 TO 2000Adc	1.0%

INPUT

RANGE	See table
OVERLOAD CONTINUOUS	±5000Adc
FREQUENCY RANGE	DC to 35Hz

OUTPUT

CURRENT SIGNAL	4 to 20mAdc
ACCURACY (Over Temperature Range)	See table & Note 1 %FS (Full Scale)
RESPONSE (10 to 90%)	10 m sec.
LOAD RESISTANCE (RL)	250 Ohms Nominal
LOAD RESISTANCE RANGE	0 to 300 Ohms
CURRENT SIGNAL @ OVERLOAD	24 mAdc typ.
PROTECTION	Reverse Polarity Protected

POWER SUPPLY (PS)

SUPPLY VOLTAGE	+24Vdc Nominal
CURRENT DRAIN	4 to 24mAdc
SUPPLY VOLTAGE RANGE	+18 to 28Vdc
TRANSIENT PROTECTION	±40V (T<5mS)

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	-40° to +85°C
STORAGE TEMPERATURE RANGE	-45° to +85°C
ISOLATION	Input to output 2KV RMS 60Hz/1min.
INSULATION RESISTANCE	500 M-Ohms @ 500Vdc
CASE MATERIAL	Molded Plastic meets UL flammability rating 94V-O
WEIGHT	14 oz. Max.
FINISH	Blue Textured Pantone No. 294C

NOTE 1: Specified accuracy includes the combined worst case effects of Zero Offset, Temperature, Hysteresis, Supply Swings and Current Cable Positioning.
NOTE 2: Insert tool and press to release.
(Recommended Tool : Screwdriver, 3/16 standard tipped)

AAC	Drawing Number 921	Rev. K
------------	-------------------------------------	-------------------------