


Dimensions in Inches, Tolerances: .XX ± .03 .XXX ± .010

DC CURRENT TRANSDUCER SERIES 936

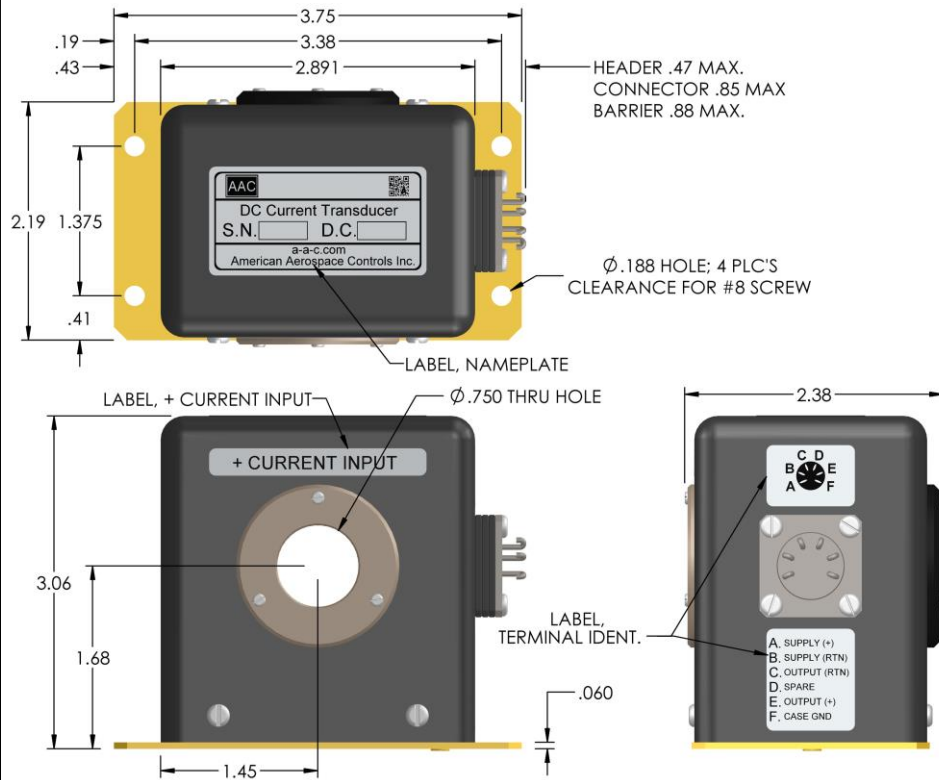

<u>PART NUMBER</u>	<u>INPUT CURRENT</u>	<u>PART NUMBER</u>	<u>INPUT CURRENT</u>
936-10	0 TO 10mA	936-250	0 TO 250mA
936-20	0 TO 20mA	936-500	0 TO 500mA
936-50	0 TO 50mA	936-1A	0 TO 1A
936-100	0 TO 100mA	936-2A	0 TO 2A
936-200	0 TO 200mA	936-5A	0 TO 5A

INPUT

CURRENT RANGE (Adc)	See Table
TRANSIENT PROTECTION	
VOLTAGE OF THRU CABLE	35KV (with insulated cable)
VOLTAGE TRANSIENT	500 Volts/u-sec
CURRENT TRANSIENT	500 Amps/u-sec
REFLECTED RIPPLE (THRU CABLE)	40mV

OUTPUT

VOLTAGE SIGNAL	0 to +5Vdc FS (Full Scale)
ACCURACY	±1.0% FS (±50mV)
RESPONSE (10 TO 90%)	100 m-sec. max.
RIPPLE	10 mV RMS max.
TEMPERATURE COEFFICIENT	± 0.1% FS/°C max.
OUTPUT IMPEDANCE (±5%)	50 Ohms typ

POWER SUPPLY

SUPPLY VOLTAGE	28Vdc ±4Vdc
CURRENT DRAIN	25mAdc max.

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	-55°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +85°C
INSULATION RESISTANCE	100 K-Ohms
WEIGHT	28 oz. max.



SOLDER
HEADER

CONNECTOR
ADD "C" TO
PART NUMBER

BARRIER OPTION
ADD "B" TO
PART NUMBER
TERMINAL "F"
NOT SUPPLIED

CONNECTOR PART NO.
PT02E-10-6P-023 OR EQUIV.
MATING CONNECTOR PART NO.
PT06A-10-6S-424 OR EQUIV.

TERMINAL IDENTIFICATION

- A. SUPPLY VOLTAGE (+)
- B. SUPPLY VOLTAGE (RTN)
- C. OUTPUT (RTN)
- D. SPARE
- E. OUTPUT (+)
- F. CASE GROUND

AAC	Drawing Number 936	Rev. M
------------	------------------------------	------------------