


Dimensions in Inches, Tolerances: .XX ± .03 .XXX ± .010

DC CURRENT TRANSDUCER SERIES 950

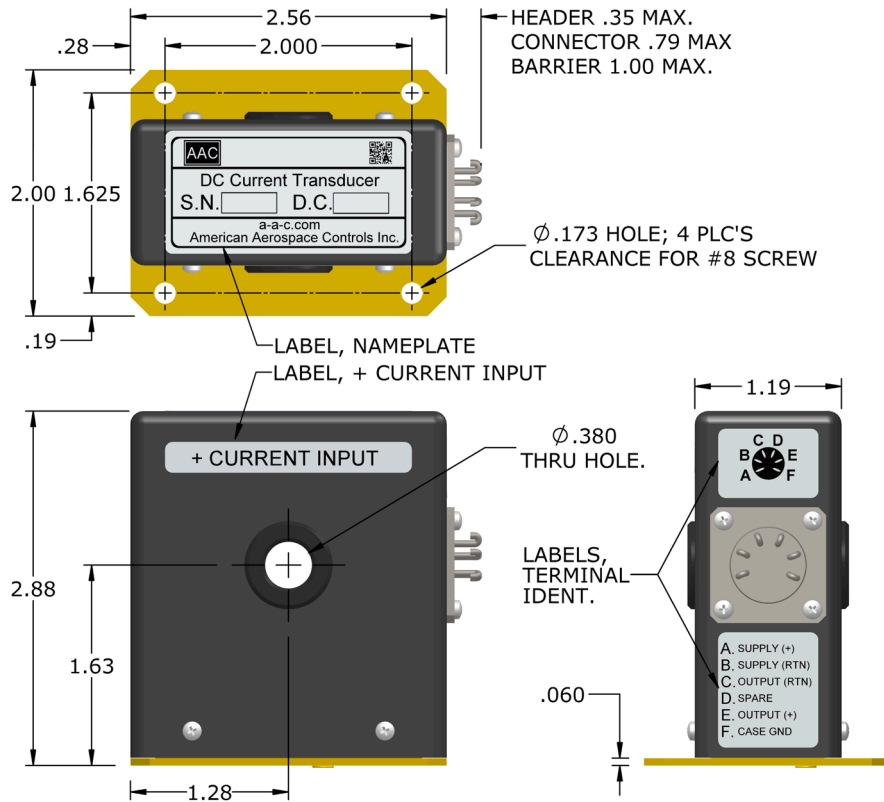

MODEL NUMBER

MODEL NUMBER	INPUT CURRENT RANGE (AMPS DC)
950-10	0 - 10
950-20	0 - 20
950-30	0 - 30
950-40	0 - 40
950-50	0 - 50

INPUT CURRENT RANGE (AMPS DC)

OUTPUT

VOLTAGE SIGNAL	0 to +5Vdc FS (Full Scale)
ACCURACY	±0.5% FS (±25mV) for 20,30,40, & 50A models ±1% FS (±50mV) for 10A model
RESPONSE (10 TO 90%)	10 m-sec. max.
RIPPLE	25mV (RMS) max.
TEMPERATURE COEFFICIENT	±.02% FS/°C
LONG TERM STABILITY	±0.1% FS/yr
OUTPUT IMPEDANCE	4000 ohms max.
OUTPUT PROTECTION	Output terminals E & C will withstand ±250Vdc for 10m-sec, ±60Vdc continuously, short circuit

POWER SUPPLY (PS)

SUPPLY VOLTAGE	28Vdc ±4Vdc
CURRENT DRAIN	70mAdc max.
OVER VOLTAGE PROTECTION	Terminals A & B withstand ±35Vdc without damage
REVERSE POLARITY PROTECTION	10µA max. current drain without damage

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS


OPERATING TEMPERATURE RANGE	-25° to +85°C
STORAGE TEMPERATURE RANGE	-55° to +85°C
DIELECTRIC STRENGTH	350 V RMS dielectric withstanding voltage (method 301 of MIL-STD-202)
INSULATION RESISTANCE	10 M-ohms min. (method 302, Condition A of MIL-STD-202)
ALTITUDE	Operating: sea level to 60,00 ft. Non operating: sea level to 120,000 ft. (method 105, Condition A of MIL-STD-202)
VIBRATION	Operating: 0.06 inch D.A., 10 to 55 Hz (method 201 of MIL-STD-202)
SHOCK	Operating: 50g, 11 m-sec half sine pulse (method 213, Condition A of MIL-STD-202)
MOISTURE RESISTANCE	Will meet method 106 of MIL-STD-202 and Method 507.1, Procedure I of MIL-STD-810
OPERATING HUMIDITY	0% to 95% RH
ATTITUDE	Unit will perform as specified when mounted in any position
WEIGHT	0.75 Lbs max.

TERMINAL IDENTIFICATION

- A. SUPPLY VOLTAGE (+)
- B. SUPPLY VOLTAGE (RTN)
- C. OUTPUT (RTN)
- D. SPARE
- E. OUTPUT (+)
- F. CASE GROUND

NOTE:


MOLDED TERMINAL BARRIER WITH 6-32 TERMINAL SCREWS
3/8 IN. CENTER TO CENTER SPACING.
ACCEPTS WIRE SIZES UP TO 14 AWG AND WIRE LUGS UP TO 9/32 IN. WIDE.



CONNECTOR OPTION

ADD "-C" TO PART NO.
CONNECTOR PART NO.
PT023-10-6P-023
PT02E-10-6P OR EQUIV.

MATING CONNECTOR
PT06A-10-6S-023 OR
PT06A-10-6S OR EQUIV.



BARRIER OPTION

ADD "-B" TO PART NO.
TERMINAL "F"
NOT SUPPLIED.

AAC

**Drawing Number
700-950**

**Rev.
K**